




# RF Master 5

Belt-Clip Radio for Mobile Reading and Configuration of the Cyble 5

The RF Master 5 is an all-purpose, walk-by/drive-by reader and programmer for use with Itron's Cyble 5. This lightweight portable device uses proprietary 868 MHz technology to communicate with the Cyble 5 and uses Bluetooth® connectivity to communicate with the Android device.

## FEATURES AND BENEFITS

- » **Ease of use.** The two diodes implemented on the RF master make it easy to follow-up and trouble-shoot the communication process in real-time.
- » **Reliable.** Confirmation of radio signal reception from the meter. Confirmation of bluetooth link to Android device.
- » **Robust.** Up to 2 days use without recharging.
- » **Convenient.** Includes a belt clip located on its rear side to easily attach it to a belt, a pocket side or other.

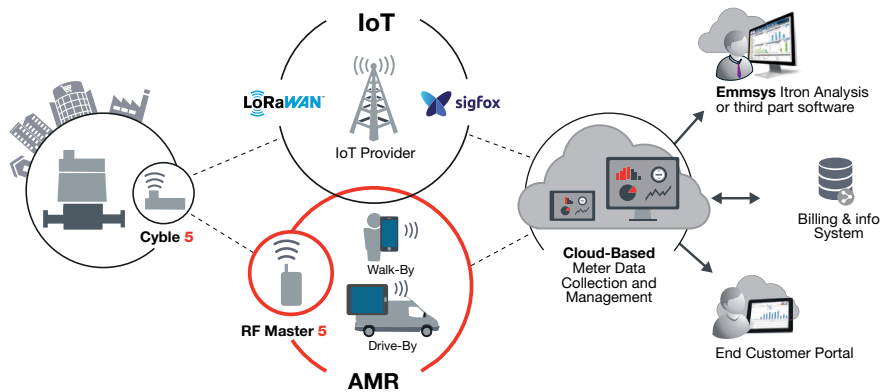

### Automated Meter Reading (AMR)

Wirelessly collect data from meters either in walk-by or drive-by mode using Itron's RF Master 5. Eliminates the need for physical access to the meter.



### IoT Networks (Sigfox® or LoRaWAN™)

Connect smart water meters to networks dedicated to the Internet of Things (IoT) using Sigfox® or LoRaWAN™ technologies.

## AN INNOVATIVE SOLUTION FOR SMART METERING


An indispensable field tool for Cyble 5 smart metering.

### Field Configuration

When used with an Android device, the RF Master 5 allows the installation and configuration of the Cyble 5. It also enables switching the Cyble 5 to the desired communication mode (Walk-by/Drive-by/LoRaWan™/Sigfox®) throughout the latter's lifetime.

### Walk-By/Drive-By AMR Reading

The RF Master 5 is a best in class mobile reader ensuring effective and fast drive-by and walk-by readings of the Cyble 5. It is supported by Itron's Temetra solution and offers a seamless turnkey data collection experience.

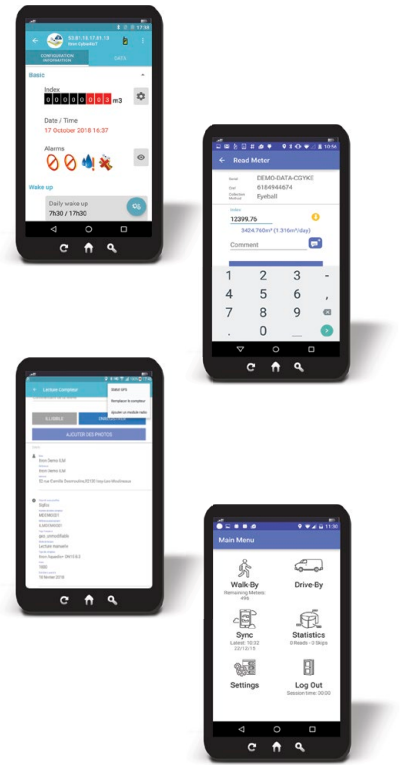

## 868 MHZ RF UNIT FOR SMART METERING

Robust and ergonomic hardware enabling multi-mode smart meter reading.

### Technical Specifications

Radio Frequency Features	
Protocol	wM-Bus
Modulation	Frequency Shift Keying
Frequency carrier	868 MHz ISM Band
Radiated power	≤ 25 mW
Transmission	Symmetrical two-way communication
Functional Specifications	
Power source	Lithium-ion rechargeable
Dimensions	H150 x L100 x W40 mm
Weight	192 g (without batteries)
Case protection	IP54
Operating temperature	-10°C / +55°C (when used without power supply) 0°C to 40°C (with power supply)
Storage temperature	-20°C / +70°C



### Compliance

- » Compliant with 2002/95/EC on non-usage of hazardous substances in electrical and electronic equipment
- » Compliant with Directive 2014/53/EU on RF spectrum usage
- » Bluetooth 2.1, SPP profile
- » RoHs, WEEE **CE**



Join us in creating a more **resourceful world**.  
To learn more visit **itron.com**

### ITRON WATER METERING

9, rue Ampère  
71031 Mâcon cedex  
France

**Phone:** +33 3 85 29 39 00  
**Fax:** +33 3 85 29 38 58

While Itron strives to make the content of its marketing materials as timely and accurate as possible, Itron makes no claims, promises, or guarantees about the accuracy, completeness, or adequacy of, and expressly disclaims liability for errors and omissions in, such materials. No warranty of any kind, implied, expressed, or statutory, including but not limited to the warranties of non-infringement of third party rights, title, merchantability, and fitness for a particular purpose, is given with respect to the content of these marketing materials. © Copyright 2020 Itron. All rights reserved. **SYS-0073.0-EN-01.20**