


Fixed Cone Free Discharge Valve

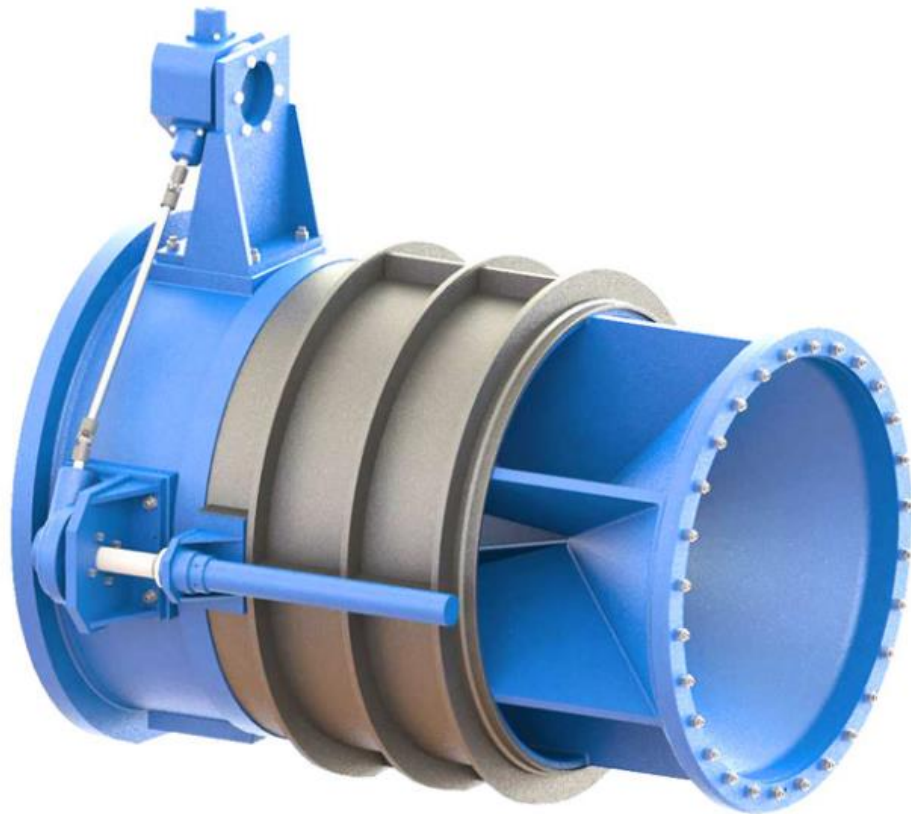

Premium Discharge Capacity

The Fixed Cone valve is typically used for free discharging control at a terminal point of a pipe or culvert at the base of a dam or reservoir stilling basin. They are also commonly used for turbine bypass, or continuous discharge in low control applications such as compensation duties.

Series 3300

Size:

8" - 158";
DN200 - DN4000

Material:

Ductile iron,
Fabricated Steel &
Stainless Steel

Pressure Rating:

Up to 16 bar

High Velocity Discharge:

Up to 25m/sec

High Discharge Capacity:

k=1.7